

Rundrohre gezogen
 Tubes ronds étirés

CW508L
CuZn37

Norm/Norme:

DIN EN 12449

Zustand/Etat:

● halbhart/demi-dur

R370

○ ziehhart/étiré dur


Stangenlänge/Longueur:

ca./env. 5 m

mm		Wandstärke/ paroi	kg/ m	CuZn37	
1	x	2	0.5	0.02	●
2	x	3	0.5	0.03	○
3	x	4	0.5	0.05	●
4	x	5	0.5	0.06	●
5	x	6	0.5	0.07	●
6	x	7	0.5	0.09	●
7	x	8	0.5	0.10	●
8	x	9	0.5	0.11	○
9	x	10	0.5	0.13	●
10	x	11	0.5	0.14	●
11	x	12	0.5	0.15	●
12	x	13	0.5	0.17	●
13	x	14	0.5	0.18	●
14	x	15	0.5	0.19	●
15	x	16	0.5	0.21	●
19	x	20	0.5	0.26	●
20	x	21	0.5	0.27	●
21	x	22	0.5	0.29	●
43	x	44	0.5	0.58	○
2	x	4	1.0	0.08	●
3	x	5	1.0	0.11	○
4	x	6	1.0	0.13	●
5	x	7	1.0	0.16	●
6	x	8	1.0	0.19	●
7	x	9	1.0	0.21	●
8	x	10	1.0	0.24	●
9	x	11	1.0	0.27	●
10	x	12	1.0	0.29	●
11	x	13	1.0	0.32	●
12	x	14	1.0	0.35	●

mm		Wandstärke/ paroi	kg/m	CuZn37	
13	x	15	1.0	0.37	●
14	x	16	1.0	0.40	●
15	x	17	1.0	0.43	○
16	x	18	1.0	0.45	●
18	x	20	1.0	0.51	●
20	x	22	1.0	0.56	●
23	x	25	1.0	0.64	●
24	x	26	1.0	0.67	●
26	x	28	1.0	0.72	●
28	x	30	1.0	0.77	●
30	x	32	1.0	0.83	●
32	x	34	1.0	0.88	●
33	x	35	1.0	0.91	●
34	x	36	1.0	0.93	●
38	x	40	1.0	1.04	●
40	x	42	1.0	1.09	●
43	x	45	1.0	1.17	●
48	x	50	1.0	1.31	●
50	x	52	1.0	1.36	●
58	x	60	1.0	1.57	●
2	x	5	1.5	0.14	●
3	x	6	1.5	0.18	●
4	x	7	1.5	0.22	●
5	x	8	1.5	0.26	●
7	x	10	1.5	0.34	●

Fortsetzung siehe Seite 5.12/suite voir page 5.12

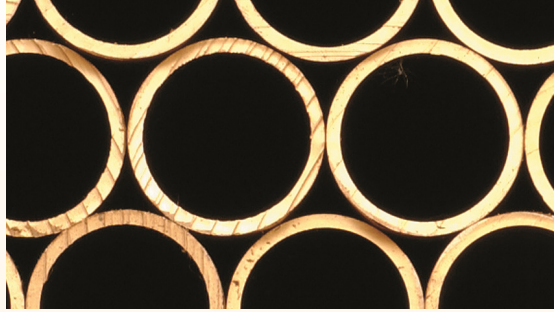

mm		Wandstärke/ paroi		kg/ m	CuZn37
9	x	12	1.5	0.42	●
10	x	13	1.5	0.46	●
11	x	14	1.5	0.50	●
12	x	15	1.5	0.54	●
13	x	16	1.5	0.58	●
15	x	18	1.5	0.66	●
17	x	20	1.5	0.74	●
18	x	21	1.5	0.78	○
19	x	22	1.5	0.82	●
22	x	25	1.5	0.94	●
23	x	26	1.5	0.98	●
25	x	28	1.5	1.06	●
27	x	30	1.5	1.14	●
30	x	33	1.5	1.26	●
32	x	35	1.5	1.34	●
35	x	38	1.5	1.46	●
37	x	40	1.5	1.54	●
42	x	45	1.5	1.74	●
47	x	50	1.5	1.94	●
3	x	7	2.0	0.27	●
4	x	8	2.0	0.32	●
5	x	9	2.0	0.37	●
6	x	10	2.0	0.43	●
7	x	11	2.0	0.48	●
8	x	12	2.0	0.53	●
9	x	13	2.0	0.59	●
11	x	15	2.0	0.69	●
12	x	16	2.0	0.75	●
14	x	18	2.0	0.85	●
18	x	22	2.0	1.07	●
21	x	25	2.0	1.23	●
22	x	26	2.0	1.28	●
28	x	32	2.0	1.60	●
30	x	34	2.0	1.71	●
32	x	36	2.0	1.81	●
36	x	40	2.0	2.03	●
38	x	42	2.0	2.14	●

mm		Wandstärke/ paroi		kg/ m	CuZn37
46	x	50	2.0	2.56	●
48	x	52	2.0	2.67	●
50	x	54	2.0	2.78	●
66	x	70	2.0	3.63	●